



1	ACCESS LADDER TO CONCRETE ROOF OF ELECTRICAL ROOM - SEE ENLARGED PLANS.
2	3'-X 3'-R HATCH WITH ACCESS LADDER FROM CONCRETE ROOF AT ELECTRICAL ROOM BELOW. G.C. TO COORDINATE WITH STRUCTURE. PAINTED SAFETY YELLOW - SEE ENLARGED PLANS AND ROOF PLAN.
3	ELECTRICAL ROOM - 1 HOUR RATED
4	FIRE PUMP ROOM - 1 HOUR RATED
5	RAMP GUARDRAIL - SEE DETAILS 4, 12 & 13 ON A-401
6	5' X 5' CONCRETE PAD, SLOPE AWAY FROM BUILDING AT 1/4" PER FT. MAX.
7	9" X 9" 24 GAUGE METAL DOWNSPOUTS WITH KYNAR FINISH
8	RECESSED CAN LIGHT IN SOFFIT ABOVE
9	DOMESTIC WATER LINE - SEE PLUMBING
10	SANITARY LINE - PROVIDE 6" PVC CLEANOUTS AT 80'-0" O.C. - SEE PLUMBING
11	DOWNSPOUTS TO BE PIPED TO HUB DRAIN OR THIRD BIRD SLOPE TO DAYLIGHT ONTRUCK COURT. PROVIDE RAMP SCREEN AT RAMP VALVE.
12	BRACING DOWN TO 14' A.F.F. - SEE STRUCTURAL

1. BUILDING TO BE 36' CLEAR JUST PAST THE FIRST COLUMN LINE IN FROM THE DOCK WALL.
2. SLAB CONTROL JOINTS TO BE SAWCUT AND NOT TO EXCEED 15" ON CENTER. SEE STRUCTURAL DRAWINGS FOR FLOOR SLAB CONTROL JOINTS. PROVIDE ALTERNATE PRICE FOR PNA PDS POWEL BARS AT SLAB CONTROL JOINTS IN SPEED BAY ONLY - SIZED AND SPACED PER A/C RECOMMENDATIONS - SEE STRUCTURAL DRAWINGS.
3. SLAB STRUCTURE TO BE CAST IN PLACE AND SPACED PER A/C RECOMMENDATIONS - SEE STRUCTURAL DRAWINGS. CALL OUT COLUMN DIMENSIONS/DIEVE.
4. SLAB WILL BE CURVED WITH A WATER-BASED DISSIPATIVE CURING COMPOUND AND WILL RECEIVE TWO COATS OF SONNEBORNE LAPONDITH FORMULA FLOOR HARDENER.
5. SLAB ON GRADE WILL BE PRE-TREATED WITH TERMITICIDE.
6. 10-MIL CLASS "A" VAPOR BARRIER TO BE PROVIDED BELOW THE SLAB ON GRADE THROUGHOUT. ALL SEAMS AND PENETRATIONS TO BE SEALED AND TAPED.
7. THICK UNIFORM EXPOSED, 4,000 PSI CONCRETE SLAB BEING ORDERED ON 6" GAB. VERIFY SUB-SLAB WITH GEOTECH REPORT. SLAB TO RECEIVE HARDENING POWDER, POLYMER BRUSH AND LASER SCREED SHALL BE ORDERED TO ATTAIN 10' TOLERANCE. SLAB TOLERANCE OF FF 4000 PSI CONCRETE TO BE ORDERED TO ATTAIN 10' TOLERANCE. SLAB ON BUILDING PAD 4" GAB, USING AN APPLICATION OF 40LBS FOR 8 INCH SECTION WITH 4" LAYER OF GAB ON TOP OF SLAB FOUNDATION AREAS DESIGNATED AS POTENTIAL OFFICE AREAS.
8. PROVIDE A ESR SPRINKLER SYSTEM THROUGHOUT.
9. PORTLAND CEMENT FINE AGGREGATE QUANTITY AND AT THE LOCATIONS AS INDICATED OR AS REQUIRED BY THE AUTHORITY HAVING JURISDICTION. EXTINGUISHERS SHALL BE EQUAL TO 1/2 INCH INDUSTRIES COSMIC 10, 10 POUND, 40-60CB, TO BE COORDINATED WITH OWNERS LAYOUT.
10. METAL ROOF DECK SHALL BE 1-1/2" TYPE "B" WIDE RIB DECKING SHOP PRIMED WHITE ON THE UNDERSIDE/INSIDE FACE - SEE STRUCTURAL DRAWINGS.
11. RACKING, FLOOR STORAGE AND EQUIPMENT BY OTHERS.
12. SEE ELEVATIONS FOR GLASS SCHEDULE.
13. ALL BOLLARDS TO BE PAINTED SAFETY YELLOW. (PROVIDE BOLLARDS AT ALL DRIVE-IN OVERHEAD DOOR JAMBS, FIRE PROTECTION RISERS, ELECTRICAL TRANSFORMERS AND EXPOSED ELECTRICAL PANELS).
14. ALL BOLLARDS SHALL BE 6" O.D. SCHEDULE 80 STEEL. PIPE SET MINIMUM 2-1/2" DIAMETER CONCRETE FOOTING WITH PIPE EXTENDED 4'-0" ABOVE PAVING OR FLOOR. FILL PIPE WITH CONCRETE AND CAP WITH PRECAST CONCRETE DOME TOP. FOOTING TO BE IN 20" SQUARE.
15. ROOF ASSEMBLY: SINGLE PLY 60 MIL WHITE TPO MEMBRANE SYSTEM MECHANICALLY FASTENED UNDER R-20 ROOF INSULATION (TWO LAYERS STAGGERED) OVER 1-1/2" METAL DECK. 15-YEAR NUL WARRANTY. R-25 ROOF INSULATION (TWO LAYERS STAGGERED) OVER OFFICE AREA.
16. 15 STAIRS AND RAILING IN THE GARAGE/LOUNGE. ALL MISC. STEEL TO BE HD GALVANIZED FOR EXTERIOR APPLICATIONS. SHOP DE-BURR UNDERSIDE OF HANDRAILS. USE GALVANIZED PAINT TO TOUCH-UP FIELD WELDING AND SCRATCHES.
17. ALL SITE CAST CONCRETE PANEL WALLS ARE TO BE CENTERLINE OF CONCRETE PANEL VERTICAL JOINT U.N.O.
18. ALL TILT WALL PANELS SHALL BE CAULKED TO FULL HEIGHT, BOTH SIDES, WITH TREMCO DYMERIC POLYURETHANE SEALANT OR EQUAL WITH BACKER ROD BEHIND THE CAULK.
19. EXTERIOR WALL TO BE PERFORMED BY PITTSBURGH PANELS PERMA-CRETE ACrylic MEDIUM TEXTURE COATING WITH ONE COAT OF PITTSBURGH PANELS PERMA-CRETE HIGH BUILD 100% PERCENT ACRYLIC FLAT ACCENT STRIPING. SEE ELEVATIONS.
20. (INTERIOR) ALL S.C.C.P. PANELS WILL BE HARD TROWEL FINISHED WITH GROUTED AND SMOOTHED CHIP AND BRACE POINTS. PANELS SHALL RECEIVE ONE (1) COAT OF ACRYLIC LATEX FLAT ENAMEL PAINT - PITTSBURGH PANELS PG010011 DELICATE WHITE.
21. (INTERIOR) DOOR CASINGS - METALS SHALL RECEIVE ONE (1) PRIMER COAT AND TWO (2) FINISH COATS OF ENAMEL. PROVIDE FIRE DEPARTMENT ACCESS SIGNAGE PER DETAIL 9/A-002 AT EACH PERSONNEL DOOR.
22. TEST AND CONFIRM COMPLIANCE WITH THE INTERNATIONAL FIRE CODE SECTION 510 FOR EMERGENCY RESPONDER RADIO COVERAGE. IF REQUIRED BY TEST, PROVIDE AND INSTALL AN EMERGENCY RESPONDER SYSTEM WITH TWO RADIO CONTRACTORS.
23. ALL MASONRY ROOFS TO RECEIVE ONE (1) COAT OF BLOCK FILL AND ONE (1) COAT OF ACRYLIC LATEX WHITE SEMI-GLOSS ENAMEL PAINT.
24. ALL INTERIOR COLUMNS SHALL BE PRIMED AND RECEIVED ONE (1) COAT OF ALKYO SEMI-GLOSS SAFETY YELLOW PAINT TO 12" A.F. COLUMNS WITH FIRE EXTINGUISHERS MOUNTED TO THEM SHALL RECEIVE A 2-0" RED STRIP AT 28" A.F. (OR AT HEIGHT DESIGNATED BY THE LOCAL FIRE MARSHALL). TOP OF THE RED STRIP/ YELLOW PAINT UP TO THE JOINTS/ GIRDERS SHALL RECEIVE ONE (1) COAT OF ALKYO WHITE SEMI-GLOSS PAINT.
25. PROVIDE 1.5 AIR CHANGES PER HOUR USING UPBLAST FANS AND INTERLOCKED LOUVERS - SEE ELEVATIONS AND MECHANICAL DRAWINGS.
26. ALL INTERIOR COLUMN SLEEVES & BLOCKOUTS SHALL BE CAULKED AROUND THE BASE OF THE COLUMNS.



**CROW
HOLDINGS**

INDUSTRIAL

BARTOW COUNTY, GEORGIA

<i>Print Record</i>	
23 FEBRUARY 2026	PLAN REVIEW
04 MARCH 2026	DESIGN REVIEW
16 MARCH 2026	DESIGN REVIEW
02 APRIL 2026	EXTERIOR OPTIONS
03 APRIL 2026	60% DESIGN REVIEW
24 APRIL 2026	95% DESIGN REVIEW

Revisions

[illegible]

Issue Date	Job No.
04/24/2026	2601014

Sheet Title

OVERALL FLOOR PLAN

Sheet No.

A-101






NOT ISSUED FOR CONSTRUCTION

(A) 1" INSULATED INNER PANE 1/4" OUTER PANE 1/4" HEAT STRENGTHENED OUTER PANE HEAT STRENGTHENED FABRICATOR: GUARDIAN GLASS STYLE: SINGULAR SN 68 COLOR: GRAY-CLEAR COATINGS: Low-E ON #2 SURFACE U-VALUE: .29 SHGC: .25	(B) 1" INSULATED INNER PANE 1/4" OUTER PANE 1/4" HEAT STRENGTHENED OUTER PANE HEAT STRENGTHENED FABRICATOR: GUARDIAN GLASS STYLE: SINGULAR SN 68 COLOR: GRAY-CLEAR COATINGS: Low-E ON #2 SURFACE U-VALUE: .29 SHGC: .25	(C) 1" INSULATED INNER PANE 1/4" OUTER PANE 1/4" HEAT STRENGTHENED OUTER PANE HEAT STRENGTHENED FABRICATOR: GUARDIAN GLASS STYLE: SINGULAR SN 68 WITH DECO HT COLOR: GRAY-CLEAR COATINGS: Low-E ON #2 SURFACE WITH #4 SURFACE BLACK SPANDREL U-VALUE: - SHGC: -
---	---	---

101	EXTERIOR TEXTURE COATING: PAINTED CONCRETE PITTSBURGH PAINTS PERMA-CRETE ACRYLIC MEDIUM TEXTURE. COLOR: TBD	COLOR LEGEND SEE ELEVATION	106	JOINT SEALER: ALUM. STOREFRONT TREMCO DYMERIC 240FC OR EQUAL COLOR: ANODIZED ALUMINUM
102	EXTERIOR TEXTURE COATING: PAINTED CONCRETE PITTSBURGH PAINTS PERMA-CRETE ACRYLIC MEDIUM TEXTURE. COLOR: TBD	COLOR LEGEND SEE ELEVATION	107	JOINT SEALER: S.C.C.P. JOINTS MASTERSEAL NP-2 POLYURETHANE OR EQUAL COLOR: TBD
103	EXTERIOR TEXTURE COATING: PAINTED CONCRETE PITTSBURGH PAINTS PERMA-CRETE ACRYLIC MEDIUM TEXTURE. COLOR: TBD	COLOR LEGEND SEE ELEVATION	108	EXPOSED METAL DOORS & FRAMES COLOR: PAINTED TO MATCH ADJACENT
104	PRE-FINISHED METAL GRAVEL STOP, GUTTER, COPING, AND DOWNSPOUTS COLOR: PAC-CLAD - TBD		109	PRE-ENGINEERED METAL CANOPY WITH 4mm ACM FASCIA AND 0.05" FASCIA GUTTER COLOR: REYNBOND - TBD
105	ALUMINUM STOREFRONT/CURTAIN WALL AS MANUFACTURED BY KAWNEER COLOR: CLEAR ANODIZED		110	PRE-ENGINEERED BULLNOSE CANOPY COLOR: PAC-CLAD - TBD

E1	CONCRETE SERVICE RAMP, SEE 12/A-401
E2	STAIR AND GUARDRAIL, TYP. SEE 6/A-401, 8/A-401, 10/A-401
E3	DOCK BUMPER - SEE WALL SECTIONS
E4	PIPE DOWNSPOUTS THRU RAMP TO TRUCK COURT. PROVIDE BIRD SCREEN AT RAMP WALL
E5	LOUVER - SEE MECHANICAL DRAWINGS
E6	LED WALL PACK - SEE ELECTRICAL DRAWINGS



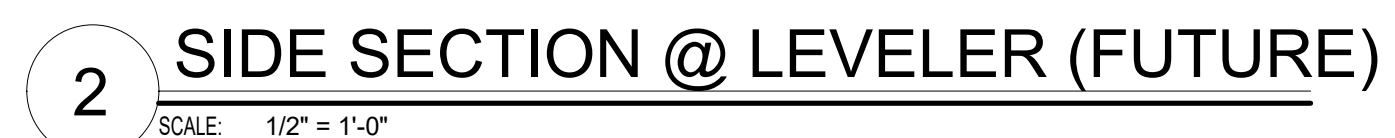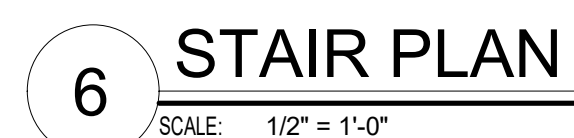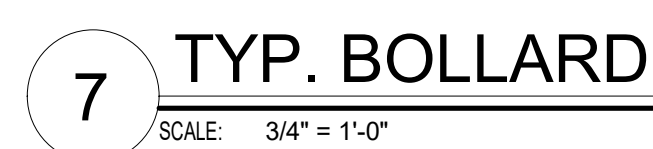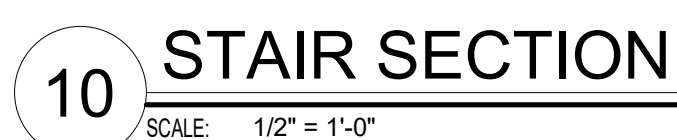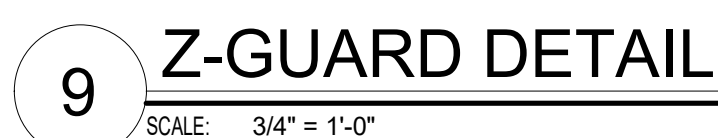

CASS WHITE ROAD

BARTOW COUNTY, GEORGIA

©2026, Atlas Collaborative LLC. These drawings are protected by the copyright laws of the United States. These drawings or any part thereof may not be used for any purpose or reproduced in any form or by any means without the written consent of Atlas Collaborative, LLC.

[Print Record](#)

23 FEBRUARY 2026	PLAN REVIEW
04 MARCH 2026	DESIGN REVIEW
16 MARCH 2026	DESIGN REVIEW
02 APRIL 2026	EXTERIOR OPTIONS
03 APRIL 2026	60% DESIGN REVIEW
24 APRIL 2026	95% DESIGN REVIEW

Revisions

[illegible]

Issue Date

04/24/2026

Job No. _____

2601014

MISC. DETAILS

Sheet No _____

A-401

NOT ISSUED FOR CONSTRUCTION

SHEET NAME: DOOR SCHEDULES, FRAMES & DETAILS SHEET NUMBER A-601 PROJECT NAME: CASS WHITE ROAD

FILE PATH: Autodeskt Doss/2801014 - Crow - Cass White/2801014 - Crow - CassWhite.rvt

DOOR SCHEDULE															
Type	Count	Fire Rating	Door						Hardware	Frame					Comments
			Width	Height	Thickness	Material	Finish	Under Cut		Type	Material	Finish	Jamb	Head	
DSF	2	-	8'-0"	7'-11"	0'-1"	AL	AN		HW4				J2	H2	NOTE 3
OD1	68	-	9'-0"	10'-0"	0'-2"	STL	FAC			2					NOTE 4
OD2	2	-	12'-0"	14'-0"	0'-2"	STL	FAC			2			J2	H2	NOTE 4
P1	24	-	3'-0"	7'-0"	0'-1 3/4"	IM	PT		HW1	1	HM	PT	J1	H1	NOTE 1
P2	2	-	4'-0"	7'-0"	0'-1 3/4"	IM	PT		HW1	1	HM	PT	J1	H1	NOTE 1
P3	1	45 MIN.	3'-0"	7'-0"	0'-1 3/4"	IM	PT		HW2	1	HM	PT	J3	H3	NOTE 2
P4	1	45 MIN.	4'-0"	7'-0"	0'-1 3/4"	IM	PT		HW3	1	HM	PT	J3	J3	NOTE 2
P5	1	45 MIN.	3'-0"	7'-0"	0'-1 3/4"	IM	PT		HW2	1	HM	PT	J3	J3	NOTE 2
SF	4	-	3'-0"	7'-11"	0'-1"	AL	AN		HW4						

GENERAL DOOR NOTES:

1. OVERHEAD AND PERSONNEL DOORS AND FRAMES TO BE DESIGNED TO MEET ALL LOCAL AND DESIGN LOADS. SEE STRUCTURAL DRAWINGS FOR DESIGN LOAD REQUIREMENTS.

WAREHOUSE DOOR HARDWARE:

ALL HARDWARE TO BE DULL CHROME FINISH (626D) OF SERIES "AL" COMMERCIAL QUALITY SCHLAGE (BEST OR EQUAL). ALL DOOR HANDLES TO BE LEVER DESIGN. ALL HINGES AND LATCHES SHALL BE STEEL WITH CHROME BRUSHED FINISH AND ALL CLOSERS SHALL BE ALUMINUM.

HW1 - SCHLAGE (OR EQUAL) HINGES, LEVER HANDLE, EXTERIOR - LOCKSET, INTERIOR - PANIC HARDWARE - CRASH BAR, AUTOMATIC CLOSER, EXTERIOR LOCK GUARD, 3" EYEBROW DRIP GUARD, WEATHERSTRIPPING, DOOR SWEEP AND ADA BUMPER THRESHOLD

HW2 - SCHLAGE (OR EQUAL) HINGES, LEVER HANDLE, EXTERIOR - LOCKSET, INTERIOR - PANIC HARDWARE - CRASH BAR, AUTOMATIC CLOSER, SMOKE SEAL, DOOR SWEEP AND ADA BUMPER THRESHOLD

HW3 - SCHLAGE (OR EQUAL) HINGES, LEVER HANDLE, EXTERIOR - LOCKSET, INTERIOR - PANIC HARDWARE - CRASH BAR, AUTOMATIC CLOSER, SMOKE SEAL, DOOR SWEEP AND ADA BUMPER THRESHOLD

HW4 - INCLUDES STOREFRONT ENTRY LOCKSET, WEATHERSTRIPPING, ADA BUMPER THRESHOLD AND FLOOR STRIP

WAREHOUSE DOOR NOTES:

NOTE 1 - (EXTERIOR DOORS) 16 GA. HOLLOW METAL DOORS IN 16 GA. WELDED HOLLOW METAL FRAMES ARE INCLUDED FOR EGRESS.

- PERSONNEL DOORS AND MISC. METALS SHALL RECEIVE ONE (1) PRIMER COAT AND TWO (2) FINISH COATS OF ALKYD ENAMEL.

NOTE 2 - (INTERIOR DOORS) 16 GA. HOLLOW METAL DOORS IN 16 GA. WELDED HOLLOW METAL FRAMES ARE INCLUDED FOR EGRESS.

- PERSONNEL DOORS AND MISC. METALS SHALL RECEIVE ONE (1) PRIMER COAT AND ONE (1) FINISH COAT OF ALKYD ENAMEL.

NOTE 3 - 24 GAUGE ACTUAL UNINSULATED, SECTIONAL, MANUALLY OPERATED, DOCK-HIGH, VERTICAL LIFT OVERHEAD DOORS WITH TWO VISION PANELS.

- DOORS SHALL BE INSTALLED ON A 3" VERTICAL TRACK WITH 25,000 CYCLE SPRINGS, WEATHERSTRIPPING, CLOSURE STEP, PROTECTED WITH Z-GUARDS AND A SLIDE LOCK MOUNTED ABOVE 48" A.F.F. TO CLEAR Z-GUARD.


NOTE 4 - 24 GAUGE ACTUAL UNINSULATED, SECTIONAL, MOTOR OPERATED, DRIVE-IN, VERTICAL LIFT OVERHEAD DOORS WITH TWO VISION PANELS.

- DOORS SHALL BE INSTALLED ON A 3" VERTICAL TRACK WITH 25,000 CYCLE SPRINGS, WEATHERSTRIPPING, PROTECTED WITH BOLLARDS AND A SLIDE LOCK MOUNTED ABOVE 48" A.F.F.

- DRIVE-IN DOORS SHALL HAVE CHAIN HOISTS

ABBREVIATIONS:

1. DOOR CONSTRUCTION:	2. FACING AND FINISH:	3. DOOR FRAME CONSTRUCTION:	4. OTHER:
HC = HOLLOW CORE	PF = PRE-FINISHED	HM = HOLLOW METAL	(X) = EXTERIOR DOOR & FRAME
SC = SOLID CORE	ST = STAIN	AL = EXTRUDED ALUMINUM	(T) = TEMPERED GLASS PER SPECS.
HM = HOLLOW METAL	PT = PAINT	EXT = EXISTING FRAME	(*) = CONCEALED HANDICAP OPERATOR
IM = INSULATED METAL	AN = ANODIZED ALUMINUM		
AL = ALUMINUM & GLASS	FAC = FACTORY FINISH		
STL = STEEL			

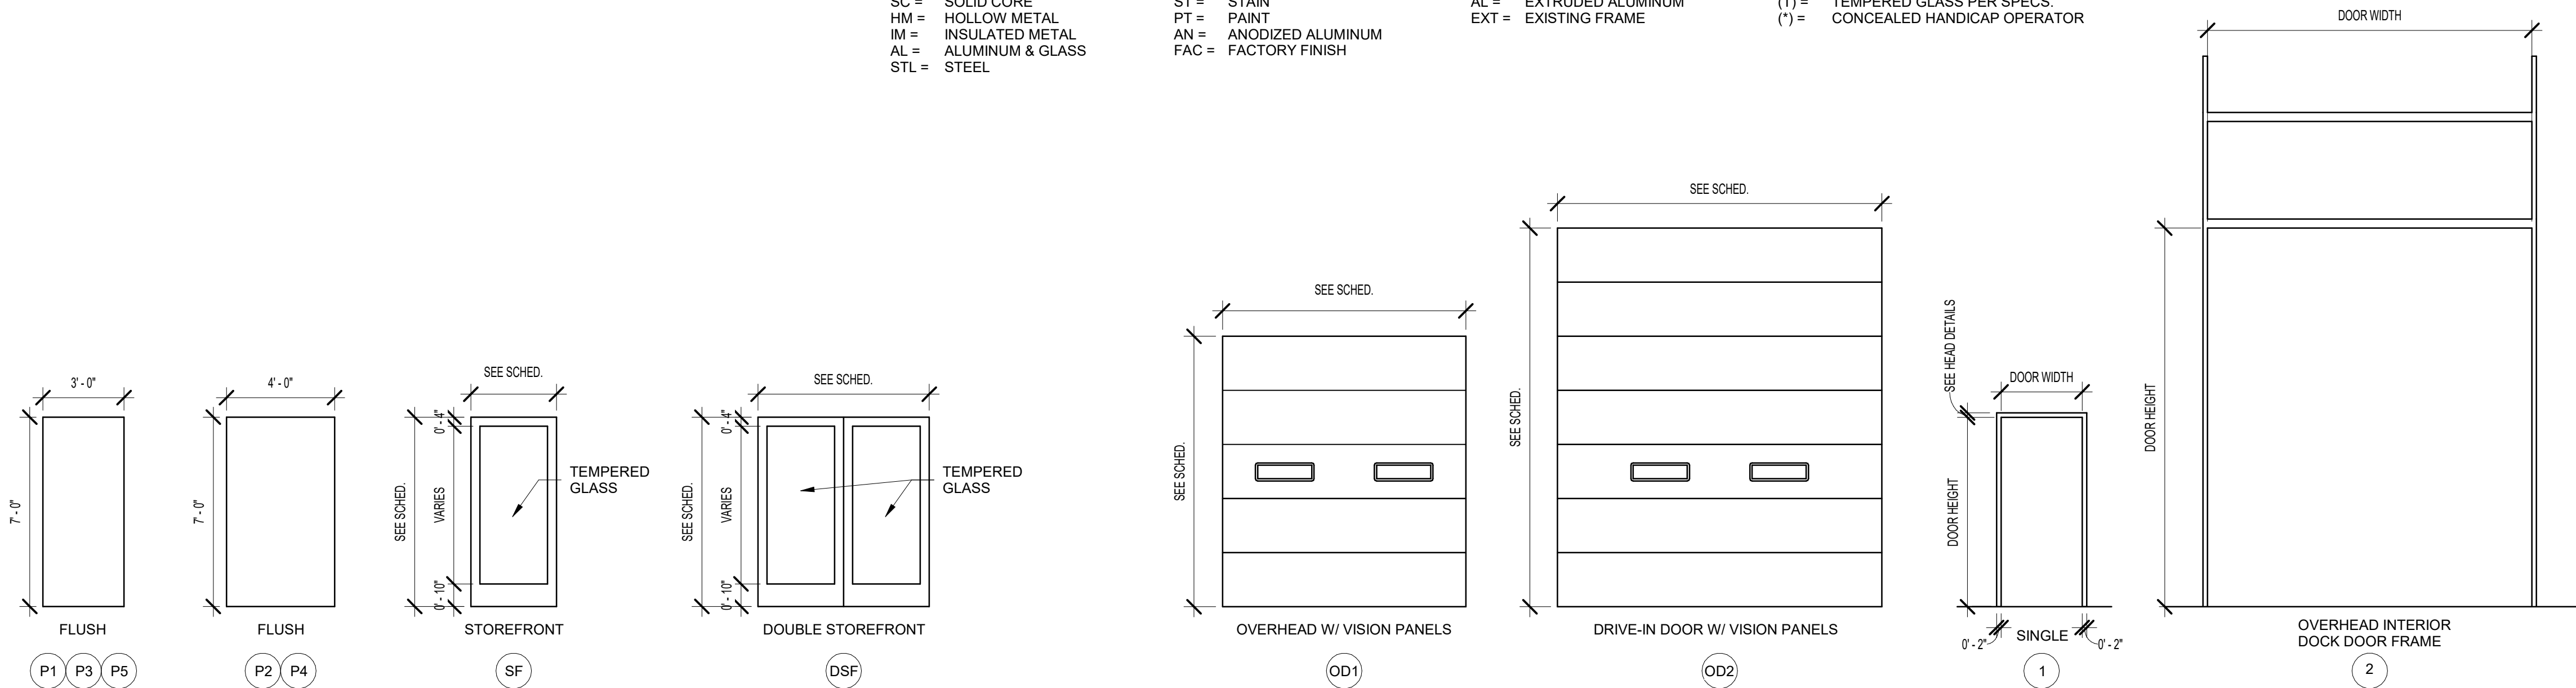


DOORS

2 DOOR & FRAME TYPES


SCALE: 1/4" = 1'-0"

FRAMES

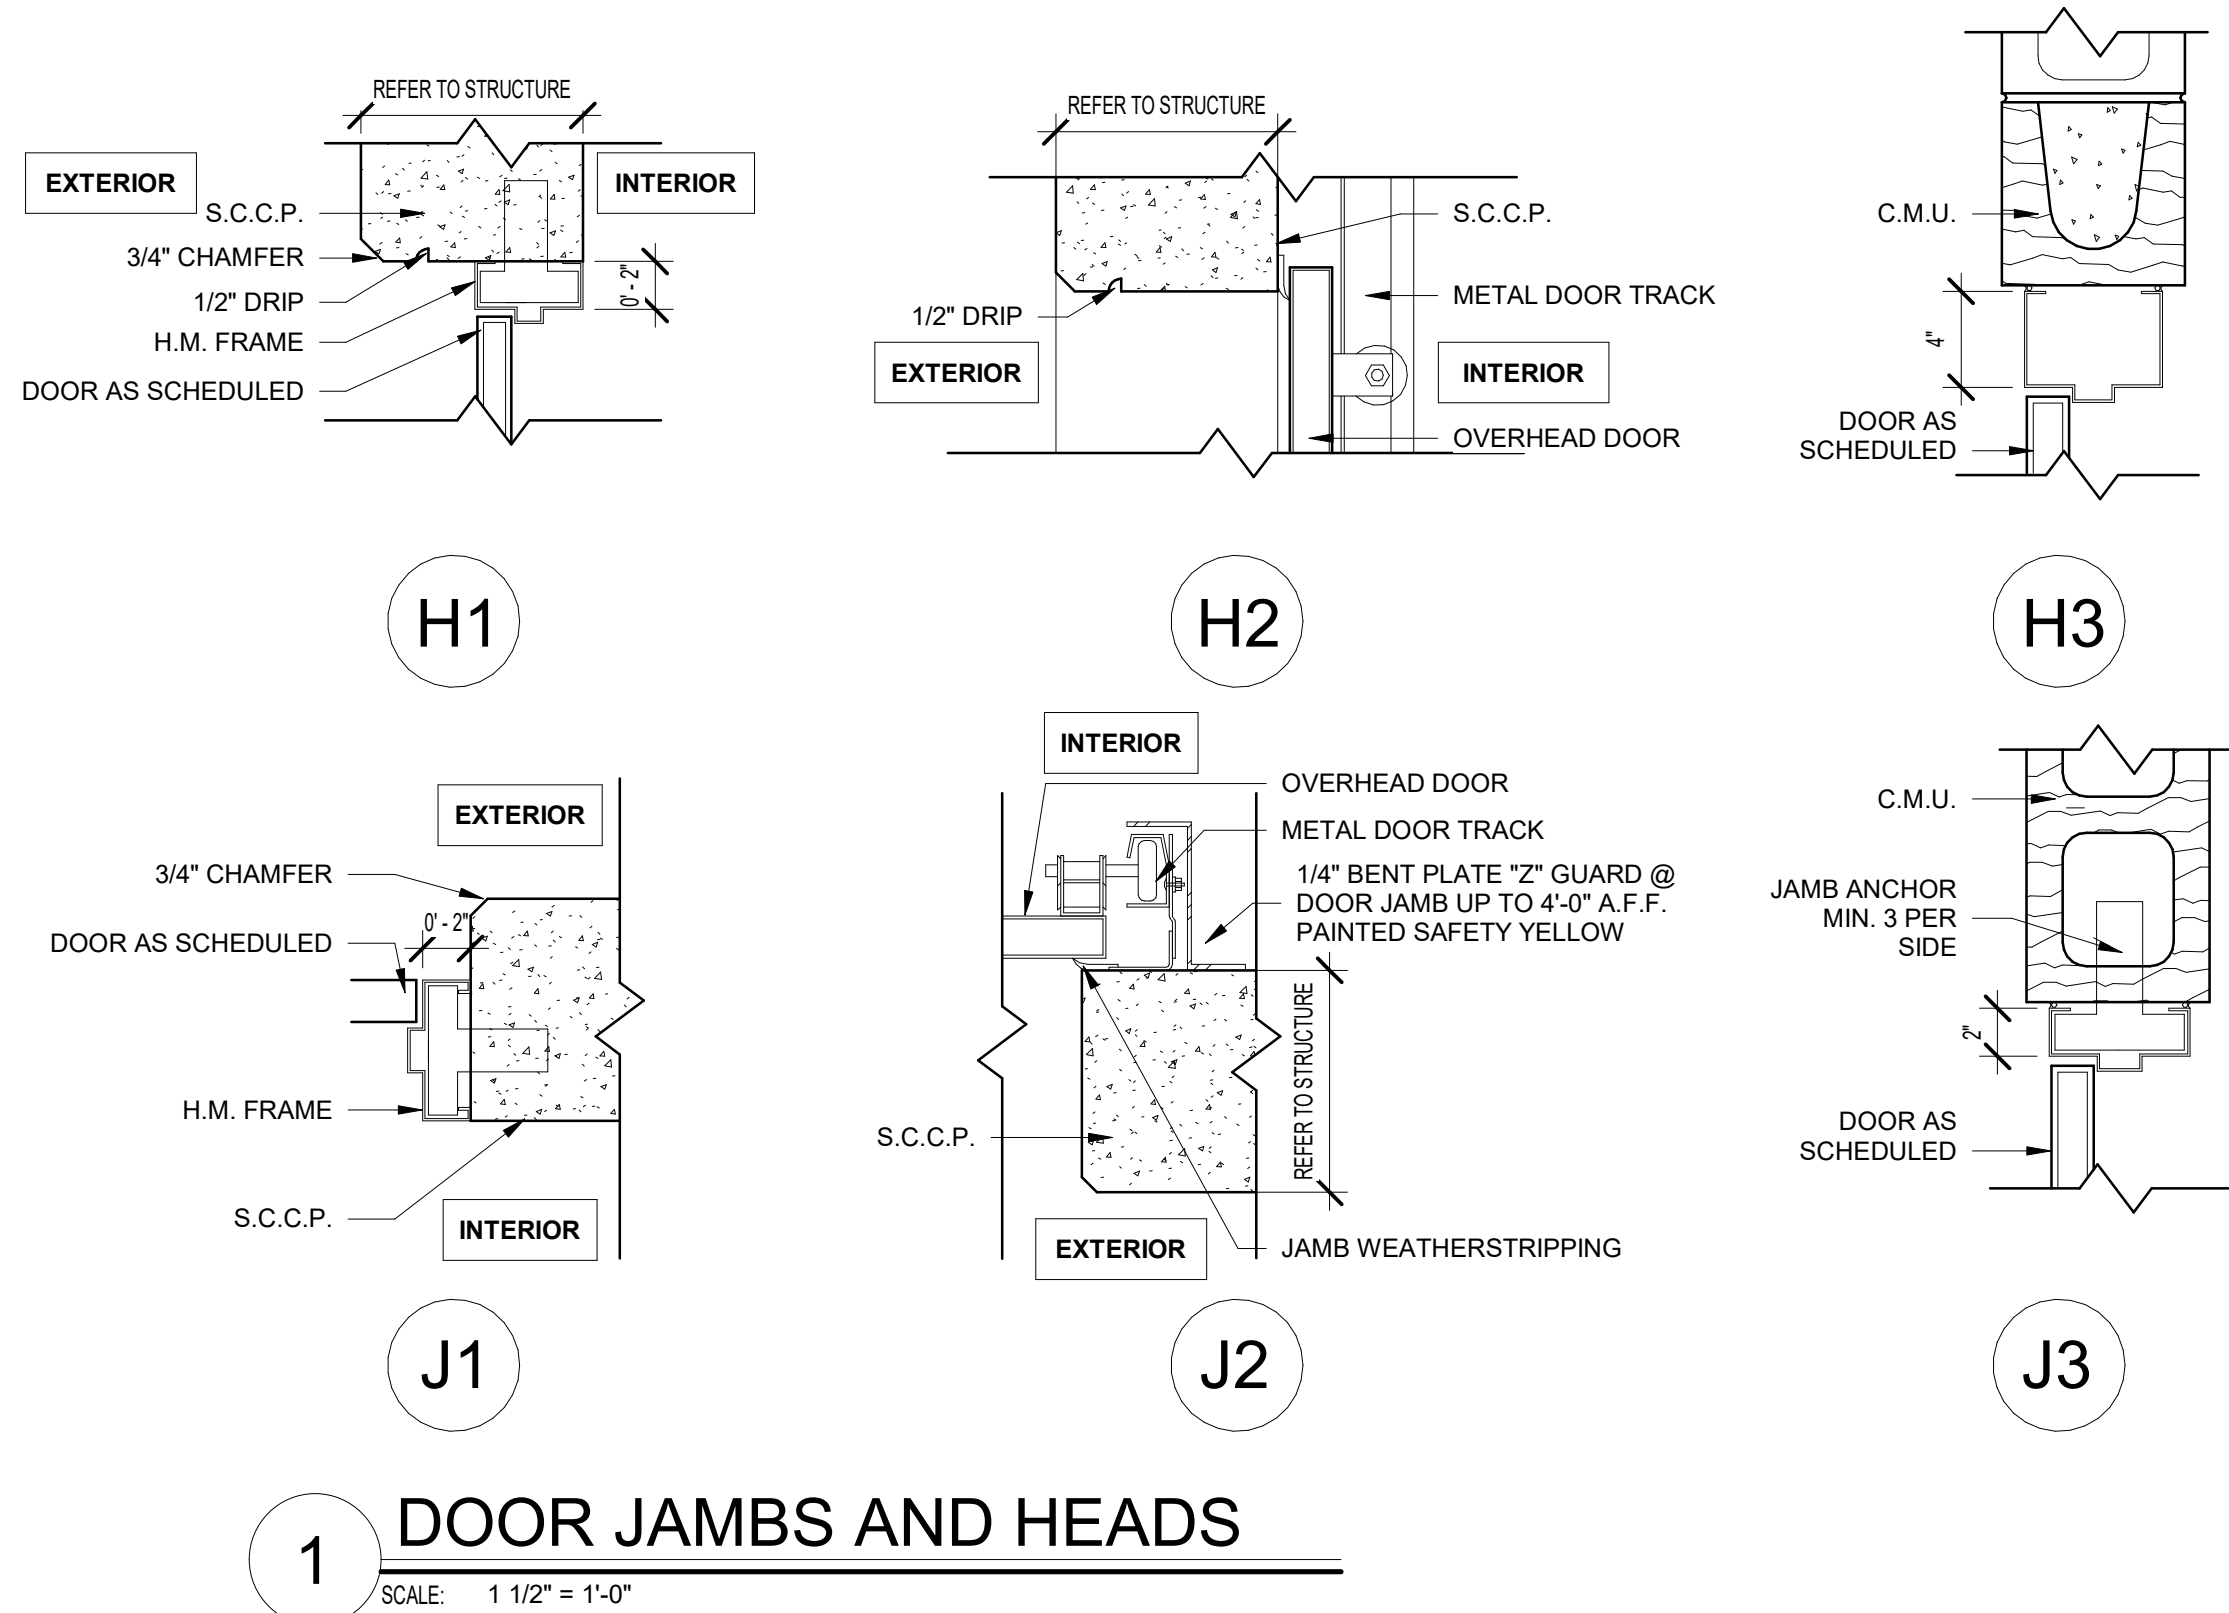

1 DOOR JAMBS AND HEADS

SCALE: 1 1/2" = 1'-0"

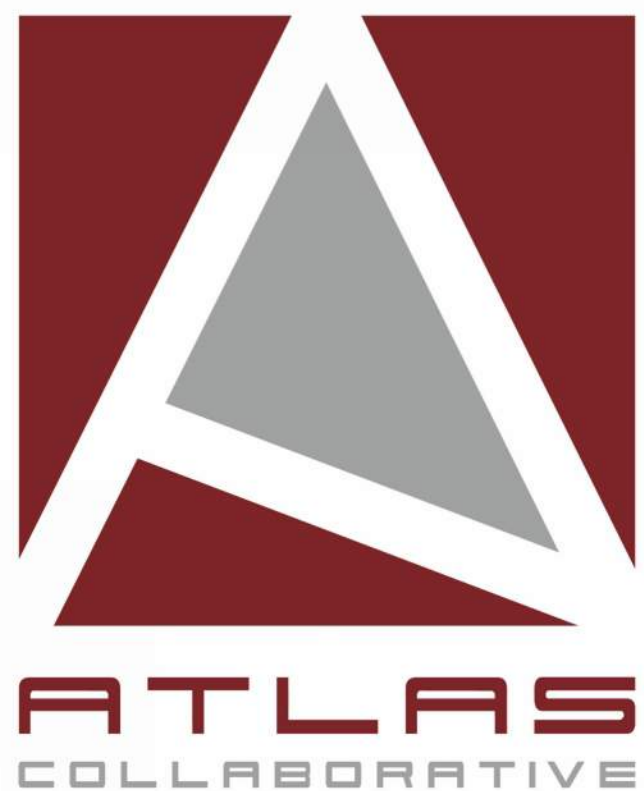

Crow Holdings
INDUSTRIAL

CASS WHITE ROAD

BARTOW COUNTY, GEORGIA

©2025, Atlas Collaborative LLC. These drawings are protected by the copyright laws of the United States. These drawings or any part thereof may not be used for any purpose or reproduced in any form or by any means without the written consent of Atlas Collaborative, LLC.

Print Record	
23 FEBRUARY 2025	PLAN REVIEW
04 MARCH 2025	DESIGN REVIEW
16 MARCH 2025	DESIGN REVIEW
02 APRIL 2025	EXTERIOR OPTIONS
03 APRIL 2025	60% DESIGN REVIEW
24 APRIL 2025	95% DESIGN REVIEW

Revisions

Issue Date	Job No.
04/24/2025	2801014

Sheet Title

DOOR SCHEDULES,
FRAMES & DETAILS

Sheet No.

A-601

NOT ISSUED FOR CONSTRUCTION